





Q15B-250 II

Plan View

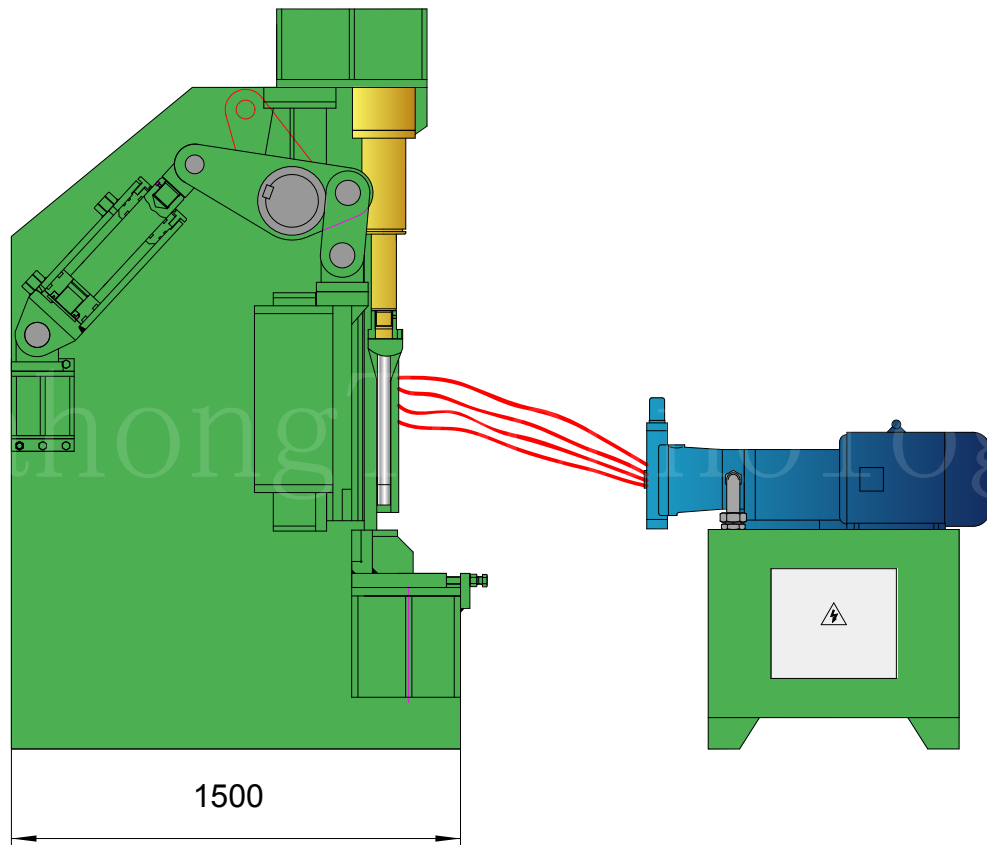

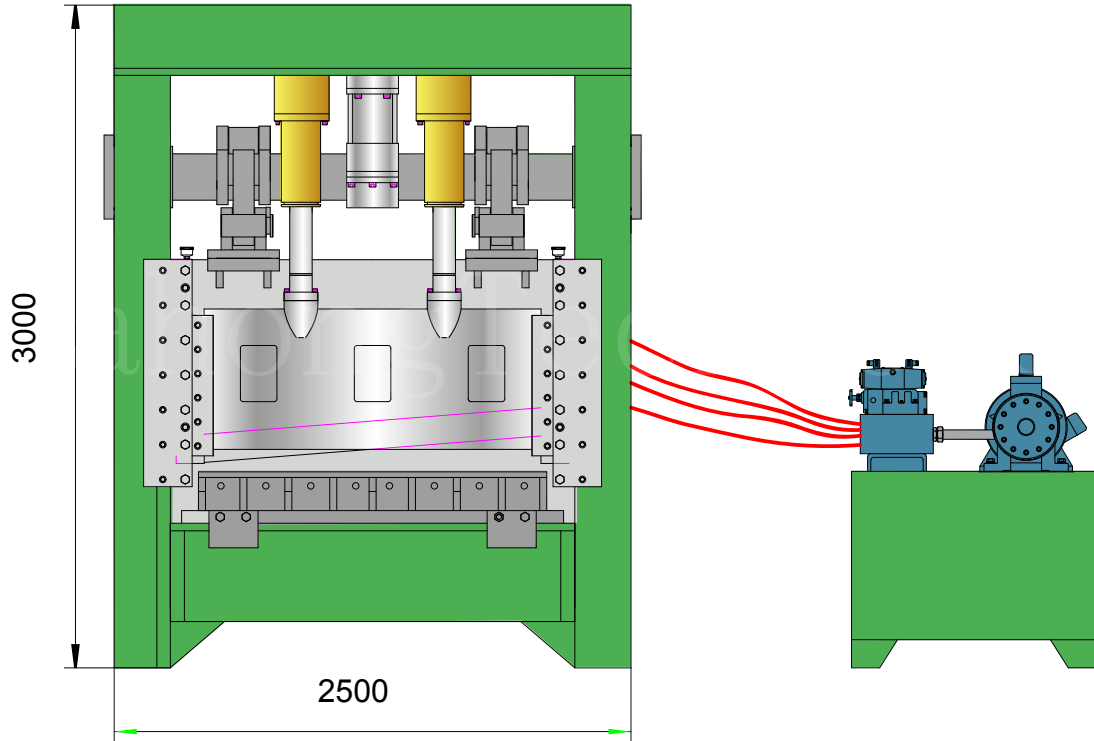

Q15B-250 II

Technical parameters

Hydraulic Shear (Square Shear)

Model: Q15B-250 II

Power System (Motor, 2 sets)

Type:	Y180M-4
Rated Power:	18.5 kW (/set)
Rated Speed:	1470 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Max. Shearing Force:	2×125 Ton
Max. Pressing Force:	2×25 Ton
Hydraulic System Pressure:	25 MPa
Cutting Speed:	4-7 times/min

Hydraulic System (Pump, 2 sets)

Type:	80YCY14-1B
Rated Displacement:	80 ml/r (/set)
Max Operating Pressure:	31.5 MPa

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Cooler / Heater;
Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

Hydro-electrical Valves, Push Button Control.

General Description

Main Machine Size (L×W×H):	2500×1500×3000 mm
Height of Working Table:	780 mm
Blade Length:	1600 mm
Blade Angle:	4 Degree
Shear Opening:	40 mm
Max. Cutting Size (Steel / Nickel Sheet):	25 / 20×1400 mm
Shipping Weight:	Approx. 10 tons
Loading (Standard Containers):	

Hydraulic Oil Brand

Oil Tank Volume: 1400 ltr

ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.