





YE82-15X

Plan View

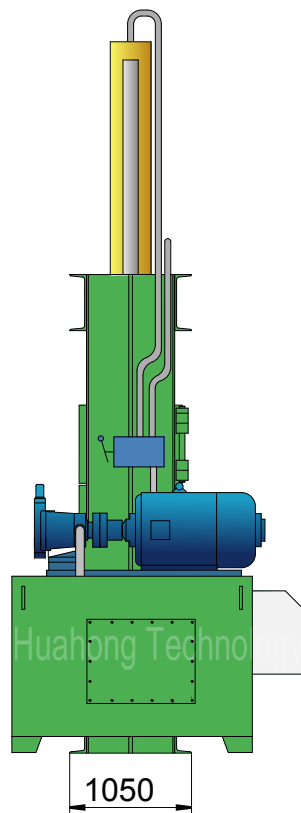

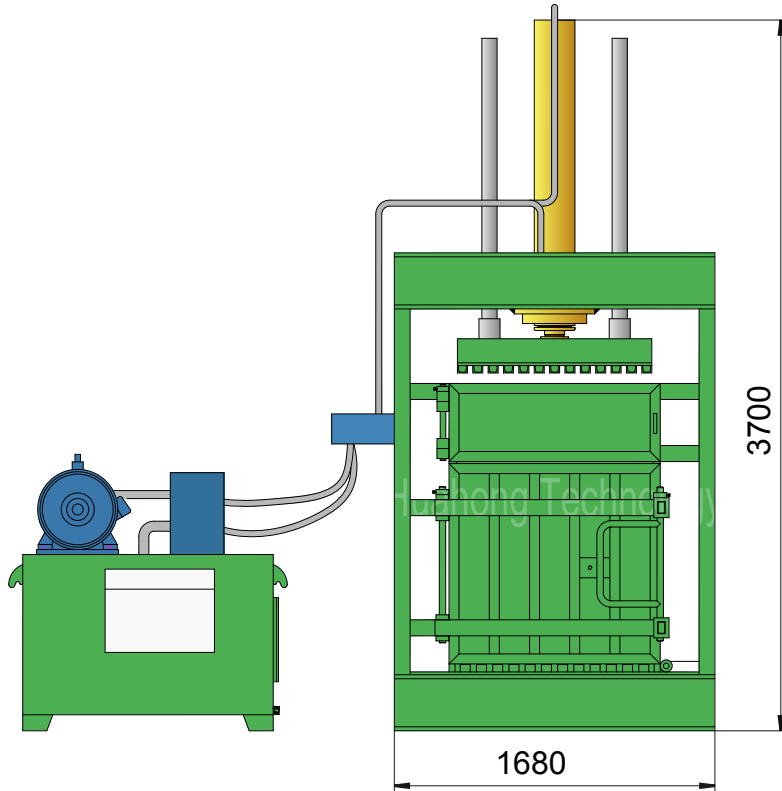

YE82-15X

Technical parameters

Yarn & Waste Cotton Baler

Model: YE82-15X

Power System (Motor)

Type: Y132M-4
 Rated Power: 7.5 kW
 Rated Speed: 1440 rpm
 Power Spec: 3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force: 15 Ton
 Hydraulic System Pressure: 10 MPa

Hydraulic System (Pump)

Type: PEED-43037/022/DWA
 Rated Displacement: 48+26 ml/r
 Max Operating Pressure: 14 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders.

Operation System

Manual Valve Operation

General Description

Main Machine Size (L×W×H): 1680×1050×3700 mm
 Press Box Size (L×W×H): 870×620×1500 mm
 Space Between Ram & Bottom: Max. 1500 mm; Min. 300 mm
 Bale Size (L×W): 870×620 mm
 Bale Weight (Waste Cotton): Approx. 80 kg
 Production Rate (Waste Cotton): 400-550 kg/hr
 Strapping: Tempered Iron Wire, φ2.8/3.2mm, Manual Strapping.
 Bale Discharging: Manual Discharging
 Shipping Weight: Approx. 2.2 tons
 Loading (Standard Containers): 1/2×20'GP

Hydraulic Oil Brand

Oil Tank Volume: 320 ltr

| ISO VG | China | U.S. | | Britain | France |
|--------|-----------|------------|---------|-----------|------------|
| | GB11118.1 | CALTEX CO. | MOBIL | SHELL | ELF CO. |
| HM 46 | 46 # | Rando HD46 | D.T.E46 | Tellus 46 | Elfolna 46 |
| HM 68 | 68 # | Rando HD68 | D.T.E68 | Tellus 68 | Elfolna 68 |

Above information are indicative not engaging. Rights reserved for change if necessary.